


AWNING PRICE LIST & PRODUCT GUIDE 2022



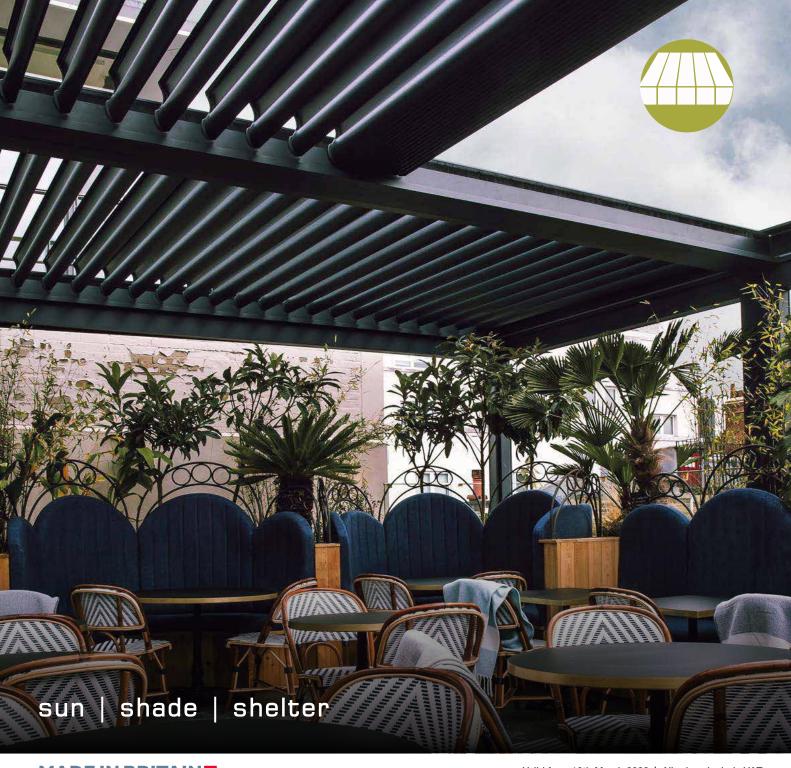


Dedicated to external shading for over 30 years, we work with leading European partners to design and develop the very finest external shading systems, that deliver genuine lifestyle enhancing and energy saving benefits, combining streamline looks and cutting edge design, with strength and durability to ensure they stand the test of time.

MADE IN BRITAIN

Proudly manufactured right here in the UK by our team of highly skilled technicians and state of the art machinery, at our modern production facility in Sudbury, Suffolk, our stylish patio awnings, innovative external blinds and award winning louvered roofs are the very pinnacle of precision, offering a superior specification to all others on the market. All our products come set up for an effortless, hassle free installation and are rigorously tested to meet or exceed stringent quality & safety standards, backed with an industry leading guarantee, upto 5 years, for peace of mind.

Deliveries are made on our own fleet of vehicles across mainland England and Wales, to your premises or direct to site, ensuring our products arrive on time, in perfect condition and our dedicated trade team offer unparalleled sales, marketing and technical support. Furthermore our installer training academy gives real hands on experience on how to correctly survey, install and commission our systems, giving total confidence.

All our products can be viewed at our outdoor living showsite and shading experience centre in Suffolk, where you will be able to see first hand the unique features and finishing touches that set our products apart.

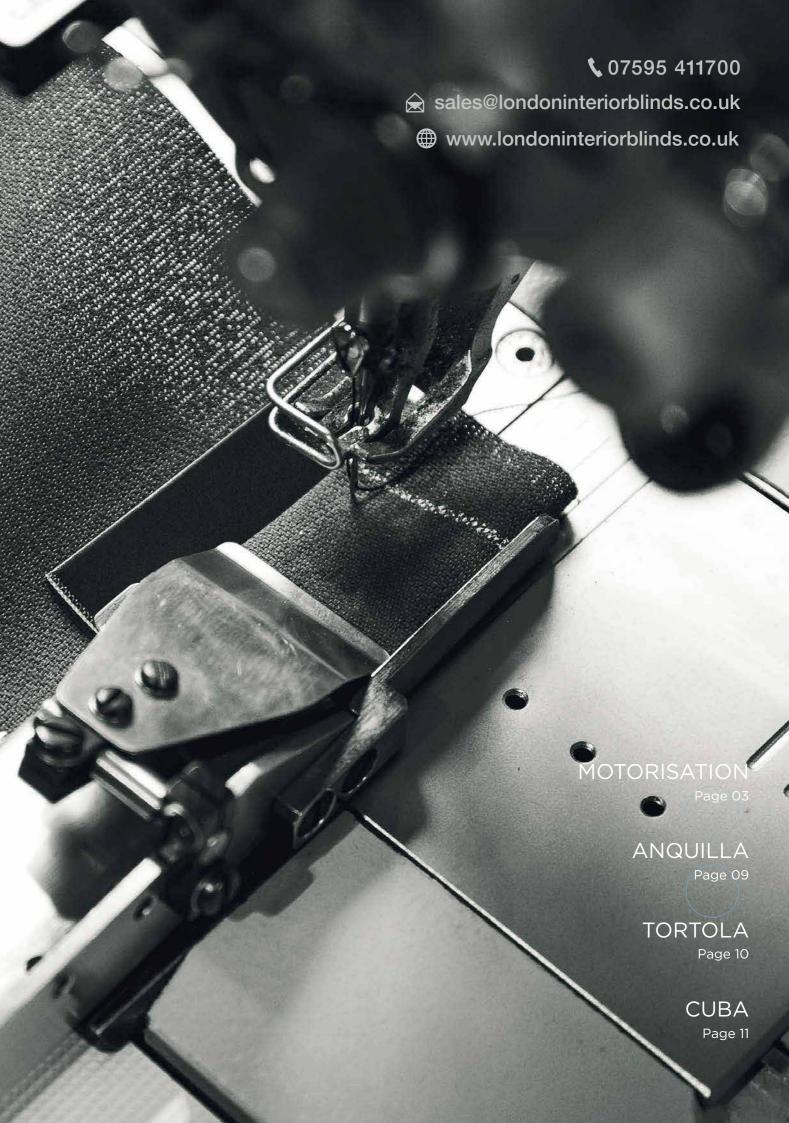

INTRODUCING io-homecontrol®



The next generation of motors, controls and sensors, exclusively featured on all patio awnings and external blinds from Caribbean Blinds - a UK first!



TWO WAY

A communicative installation: io-homecontrol makes it possible to exchange information between control units, automated systems and motors, enabling feedback in real time, thus making installation, use and maintenance easier.

MULTI-FREQUENCIES

More reliable transmission: io-homecontrol scans three radio frequencies between 868 and 870 MHz and automatically chooses the best one to transmit the command.

ENCRYPTED

Dialogue is 100% secure: The tamperproof 128-bit encryption key will thwart any hacking attempt. This encryption key is exclusive to each installation and provides the same level as an online bank transaction.

RANGE

Guaranteed coverage: The frequency used(868 MHz) produces excellent results in terms of signal propagation and guarantees coverage within a radius of at least 20m in a concrete building. Out in the open this range increases to at least 200m.



SITUO 5 VAR A/M

All in one handset

- 4+1 channels (individual & group control)
- · Auto/Manual function (switch sun sensor on/off)
 - Scroll wheel (dim lighting)
- · My favourite position (intermediate point)
- · Complete with wall bracket (use as a wall switch)

(fitted with 1 x CR2430 battery)



EOLIS 3D WIREFREE IO

Vibration sensor for patio awnings

(fitted with 2 x AAA batteries)



EOLIS WIREFREE IO

Wind sensor for external blinds



SUNIS WIREFREE II IO

Sun sensor for patio awnings & external blinds

(fitted with 2 x AA batteries)



THERMIS WIREFREE IO

Temperature sensor for patio awnings & external blinds

Thermis io in only available in conjunction with Tahoma (required to set up and adjust settings).





Do more with io when connected to TaHoma®

Tahoma® is a smart hub that connects to the home broadband, allowing control of external shading system(s) from anywhere with wifi via the Tahoma app on a smartphone, tablet or computer.

- Enjoy real time control: set exactly the position the external shading system is needed and it will go to the desired point.
- Create different scenarios: enable simultaneous control of a group of external shading systems, to go to pre-determined positions.
- Set an agenda: ensure external shading systems go to pre-set positions created in scenarios automatically at the required times of the day.

RTS motors are also compatible with TaHoma but you do not benefit from 2-way control and communication.

PREMIUM QUALITY HIGH-TEX FABRICS

The most technically advanced and luxurious fabrics, exclusively featured on all patio awnings and external blinds from London Interior Blinds.



HIGHEST FADE RESISTANCE

Solution dyed fibres resist fading and do not break down even after years of exposure to the sun.



EXTRAORDINARY COLOUR LUMINOSITY

Colours that shine and come alive when backlit with the sun thanks to the combination of the CBA (Clean Brilliant Acrylic)



GREATEST WATER COLUMN

The tightest woven fibres, provide a water column of min. 450 mm to ensure a water repellent fabric.



The smooth, dense fabric surface, coupled with unique TEXgard coating impregnated into each fibre, prevents dirt and water clinging to the fabric




OUTSTANDING DIMENSIONAL STABILITY

Fabric that holds and keeps it shape when under tension for a crisp, taut material. surface to ensure it keeps a clean visual appearance.



OPTIMUM UV PROTECTION

Certified to stringent UV 801 standards, fabrics block upto 99% of ultraviolet rays increasing the protection time of skin to sunlight by a minimum of 40x.




Colour pigments are infused Pigments penetrate just the all the way to the core of the outer surface of the fabric, fibre ensuring the colours therefore these fabrics will

OTHER BRANDS


fade over time





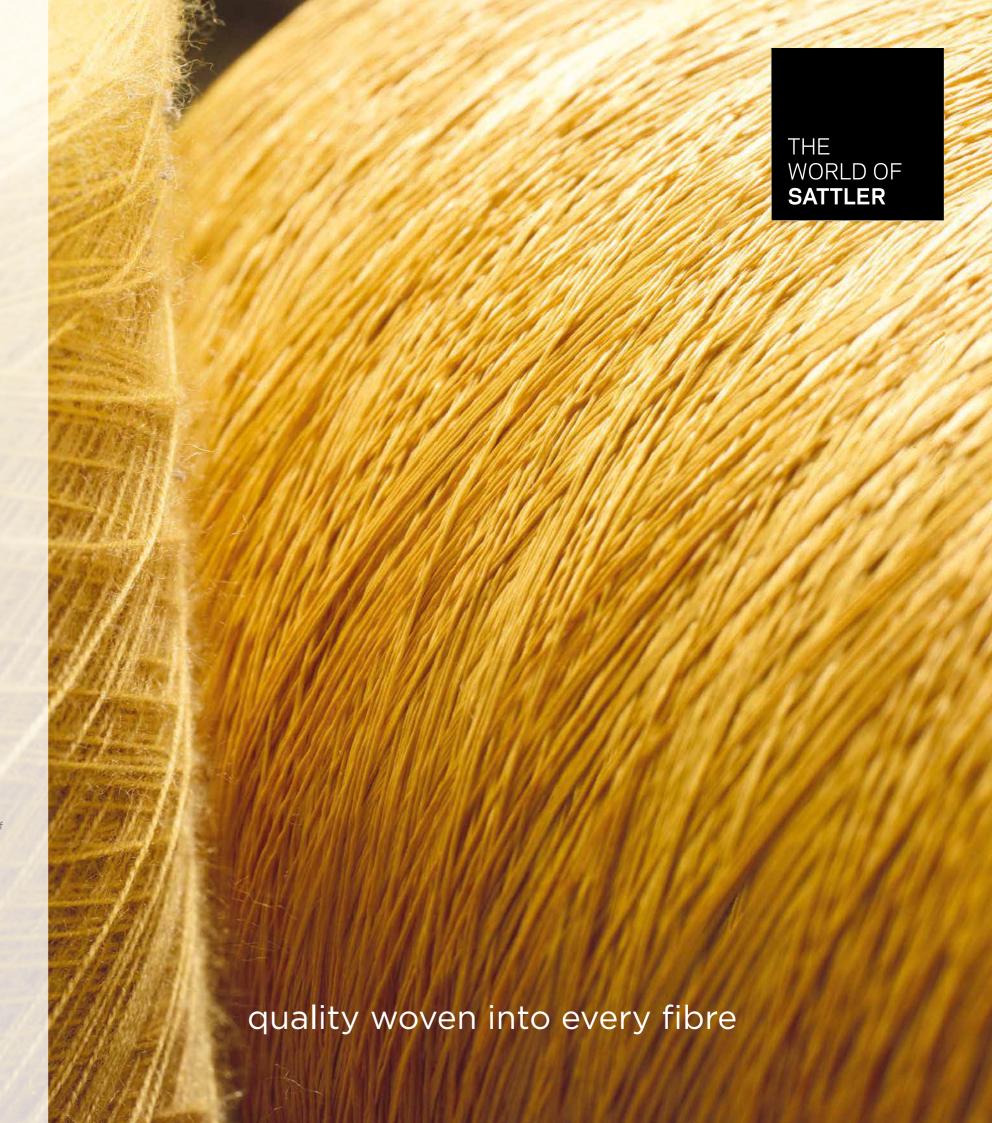


Our premium UK manufactured patio awnings feature superstrong alu frameworks, next generation motors & controls and exclusive CBA fabrics that upto 50% less dirt adheres.



WIDTH


The width of a patio awning is the measurement from outside to outside of cassette casing.

It is recommended to overhang the door or window the awning is going over by a minimum 0.5m (50cm) each side to offer adequate shade, as the sun moves around the awning / property.



PROJECTION

The projection of a patio awning is the size (depth) of the folding arms. It is recommended to select a minimum projection of 2.5m - 3m to provide good coverage to a terrace. Smaller projections are suitable where primarily internal shade only is required.



MOUNTING HEIGHT

The mounting height of a patio awning is the distance from the ground to underside of cassette on the facade.

It is recommended to install a patio awning based on the below calculation to ensure it has the required 14 degree pitch (factory set) for rain shower water run off.

Formula: Leadrail (front profile) walk under height (normally 2m)

+ (25cm per metre projection) = mounting height

Example: 3m projection awning with 2m leadrail height 2m (leadrail) + (25cm x 3) = 2.75m mounting height



Patio Awnings Range Overview (folding arm models)

Model	Description	Casing	Fixing Points	Width from - to	Projection fixed arm sizes	Fabric	Operation
	Budget friendly awning for residential applications	Full Cassette 152mm high x 223mm deep	End Fix bracket at each end of awning	1.78m - 4.00m	- 1.50m - 2.00m - 2.50m	World of Sattler - 3D Surface - Landscape - Urban - Solids	Somfy IO Motorised Remote Control manual operation via gear box & crank handle is available
	The UK's most popular awning for residential application	Full Cassette 152mm high x 223mm deep	End Fix bracket at each end of awning	1.78m - 5.00m	- 1.50m - 2.00m - 2.50m - 3.00m	World of Sattler - 3D Surface - Landscape - Urban - Solids	Somfy IO Motorised Remote Control manual operation via gear box & crank handle is available
	The ultimate awning for residential & commercial applications	Full Cassette 220mm high x 147mm deep	Multi Fix brackets across width of awning	2.05m - 7.0m (single unit) 14.0m (coupled unit)	- 1.50m - 2.00m - 2.50m - 3.00m - 3.50m - 3.75m	World of Sattler - 3D Surface - Landscape - Urban - Solids	Somfy IO Motorised Remote Control

IMPORTANT FABRIC INFORMATION

Despite the most advanced manufacturing techniques, rippling and puckering of the material will occur around the seams (where the fabric is joined - vertical joins every 1.2m) and at the edges (hems) due to the double thickness of material on these parts 'v' the single thickness of the main panel of fabric. This is a natural characteristic that cannot be avoided, however it will not affect the function or performance of our patio awnings. For further information including visuals please get in touch

Hardware	Pitch angle	Fabric Width	Arms	Brackets	Wind Class EN13561	Lighting	Heating	Sensors
- Anthracite Grey RAL 7016 matt textured - White RAL 9016 semi gloss any other RAL colour is available (surcharge + extended lead time)	0 - 45 degrees 0cm - 75cm fall per metre	- 230mm (motorised) - 210mm (manual) less than awning width	66mm Twin Cable pressure die cast joints - upto 4.0m wide = 2	Face Fix 100mm wide - upto 4.0m wide = 2	Class 2 Beaufort 5 Fresh breeze, small trees begin to sway	ght strip Tortola mounted	glare unit Il beneath awning	oi b
- Anthracite Grey RAL 7016 matt textured - White RAL 9016 semi gloss any other RAL colour is available (surcharge + extended lead time)	O - 45 degrees Ocm - 75cm fall per metre	- 230mm (motorised) - 210mm (manual) less than awning width	66mm Twin Cable pressure die cast joints - upto 5.0m wide = 2	Face Fix 100mm wide - upto 5.0m wide = 2	Class 2 Beaufort 5 Fresh breeze, small trees begin to sway	arm white LED lig beneath Anguilla / Tc to underside Cuba	a-red 1.5kw ultralow 3m mounted on wall	3D Wirefree Wind nis Wirefree II Sun io
- Anthracite Grey RAL 7016 matt textured - White RAL 9016 semi gloss any other RAL colour is available (surcharge + extended lead time)	5 - 38 degrees 10cm - 65cm fall per metre	- 170mm less than awning width	73mm Quad Cable drop forged joints - upto 5.5m wide = 2 - upto 7.0m wide = 3 - upto 11.0m wide = 4 - upto 14.0m wide = 6	Face Fix 300mm wide - upto 3.5m wide = 2 - upto 6.5m wide = 3 - upto 7.0m wide = 4 - upto 14.0m wide = 7	Class 3 Beaufort 6 Strong breeze, large branches in motion	3,500k wa mounted on wall b	Aruba infra-r heat output 4m x 3r	Eolis 3D Sunis V

GUARANTEE

All our patio awnings come with a 5 year parts guarantee, covering the hardware (metalwork inc folding arms), fabric (valance excluded) and mechanism (motors, controls & sensors). Accessories, including lighting, heating & special brackets come with a 12 month parts guarantee. Refer to terms & conditions for full details.

LEAD TIMES

Lead times stated are in working days, from when order is received including all finishing and assortment details including pre-payment if required.

ANGUILLA

Our premium UK manufactured patio awnings feature superstrong alu frameworks, next generation motors & controls and exclusive CBA fabrics that upto 50% less dirt adheres.

Operation:



PRICES INCLUDE SOMFY IO MOTOR WITH 5M POWER CABLE AND SITUO 5 VAR A/M HANDSET

The best value folding arm awning in the UK

 Full cassette · At each end Fixing Points:

Brackets: • Face fix (std) or top fix Fabric: World of Sattler collection Hardware: • White RAL 9016 semi gloss

> Anthracite Grey RAL 7016 matt fine textured • Other RAL colours available - price on request

Motorised via integral Somfy IO motor (5m power cable)

• Manual via gear box & 1.4m detachable crank handle • Face Fix - 152mm high x 223mm deep Casing Dims:

• Top Fix - 154mm high x 229mm deep • Twin cable, twin spring - Upto 4m wide = 2 Arms

Pitch (Angle): • 0 - 45 degrees (0cm - 75cm per metre) Fabric Width: • Motorised - 230mm less than awning width • Manual - 210mm less than awning width

Wind Rating: • Class 2 under EN13561 (Beaufort 5 - 24mph, fresh breeze) Sensors:

• Eolis 3D wirefree wind sensor io - price on request • Sunis wirefree II sun sensor io - price on request

Special Brackets: Spreader plate - price on request (3 year guarantee) • Cantilever bracket - price on request

TORTOLA

Our premium UK manufactured patio awnings feature superstrong alu frameworks, next generation motors & controls and exclusive CBA fabrics that upto 50% less dirt adheres.



PRICES INCLUDE SOMFY IO MOTOR WITH 5M POWER CABLE AND SITUO 5 VAR A/M HANDSET

The best value folding arm awning in the UK

 Full cassette At each end Fixing Points:

Brackets: • Face fix (std) or top fix Fabric: World of Sattler collection Hardware: • White RAL 9016 semi gloss

> Anthracite Grey RAL 7016 matt fine textured • Other RAL colours available - price on request

Operation: • Motorised via integral Somfy IO motor (5m power cable)

 Manual via gear box & 1.4m detachable crank handle • Face Fix - 152mm high x 223mm deep Casing Dims:

• Top Fix - 154mm high x 229mm deep • Twin cable, twin spring - Upto 5m wide = 2 Arms: Pitch (Angle): • 0 - 45 degrees (0cm - 75cm per metre) Fabric Width: • Motorised - 230mm less than awning width • Manual - 210mm less than awning width

Wind Rating: • Class 2 under EN13561 (Beaufort 5 - 24mph, fresh breeze) Sensors:

• Eolis 3D wirefree wind sensor io - price on request • Sunis wirefree II sun sensor io - price on request

Special Brackets: • Spreader plate - price on request (3 year guarantee) • Cantilever bracket - price on request

WIDTH (made to measure)

	2.0m	2.5m	3.0m	3.5m	4.0m
1.5m	£2134 min. width 1.78m	£2299	£2486	£2574	£3025
2.0m	N/A	£2277 min. width 2.30m	£2574	£2673	£3168
2.5m	N/A	N/A	£2673 min. width 2.73m	£2772	£3289

Valance	
LED light strip	
Aruba Heater	ADDITIONAL OPTIONS AVAILABLE Prices to be confirmed on quotation
Masonry Fixings	
Bracket Covers	

All prices include VAT | For more information please contact sales@londoninteriorblinds.co.uk or call 07595 411700

WIDTH (made to measure)

	2.0m	2.5m	3.0m	3.5m	4.0m	4.5m	5.0m
1.5m	£2247 min. width 1.78m	£2409	£2607	£2717	£3190	£3245	£3432
2.0m	N/A	£2486 min. width 2.30m	£2695	£2816	£3311	£3355	£3575
2.5m	N/A	N/A	£2794 min. width 2.73m	£2904	£3432	£3476	£3718
3.0m	N/A	N/A	N/A	£3003 min. width 3.21m	£3553	£3597	£3850

Valance	
LED light strip	
Aruba Heater	
Masonry Fixings	
Bracket Covers	

ADDITIONAL OPTIONS AVAILABLE Prices to be confirmed on quotation

All prices include VAT | For more information please contact sales@londoninteriorblinds.co.uk or call 07595 411700

Anguilla

Motor limits are pre-set, with the handset and any sensors commissioned to the motor and the pitch of the awning pre-set to 14 degrees (25cm fall per metre) - required for rain shower water run off (EN13561). The pitch can be set at a different angle, if required.

- · Valance is available upto 30cm high, either straight or loose wave
- LED lighting strip is mounted on the wall beneath awning (1 year guarantee) Aruba heater is mounted on the wall beneath awning (1 year guarantee)
- Any other RAL colour and cantilever brackets increases lead time to 25 days

FREE delivery

Tortola

PROJECTION

OPTIONS

Motor limits are pre-set, with the handset and any sensors commissioned to the motor and the pitch of the awning pre-set to 14 degrees (25cm fall per metre) - required for rain shower water run off (EN13561). The pitch can be set at a different angle, if required.

- Valance is available upto 30cm high, either straight or loose wave (no guarantee)
- LED lighting strip is mounted on the wall beneath awning (1 year guarantee)
- Aruba heater is mounted on the wall beneath awning (1 year guarantee)
- Any other RAL colour and cantilever brackets increases lead time to 25 days
- FREE delivery

CUBA - SINGLE UNIT

Our premium UK manufactured patio awnings feature superstrong alu frameworks, next generation motors & controls and exclusive CBA fabrics that upto 50% less dirt adheres.

Arms:

Pitch (Angle):

Sensors:



PRICES INCLUDE SOMFY IO MOTOR WITH 5M POWER CABLE AND SITUO 5 VAR A/M HANDSET

The best value folding arm awning in the UK

• Full cassette Casing:

Fixing Points: • Multiple, across width of awning Brackets: • Face fix (std) or top fix Fabric: • World of Sattler collection

Hardware: • White RAL 9016 semi gloss

• Anthracite Grey RAL 7016 matt fine textured • Other RAL colours available - price on request

Operation: • Motorised via integral Somfy IO motor (5m power cable)

Manual via gear box & 1.4m detachable crank handle

Casing Dims: • Face Fix - 220mm high x 147mm deep

• Top Fix - 247mm high x 160mm deep

• Quadruple cable, twin spring - Upto 5.5m wide = 2

- 5.51m - 7.0m wide = 3

• 5 - 38 degrees (10cm - 65cm per metre)

Fabric Width: • 170mm less than awning width

Wind Rating: • Class 3 under EN13561 (Beaufort 6 - 30mph, strong breeze)

• Eolis 3D wirefree wind sensor io - price on request

• Sunis wirefree II sun sensor io - price on request

Special Brackets: • Spreader plate - price on request Cantilever bracket - price on request (3 year quarantee)

WIDTH (made to measure)

		2.5m	3.0m	3.5m	4.0m	4.5m	5.0m	5.5m	6.0m	6.5m	7.0m
	1.5m	£2838 min. width 2.05m	£3102	£3245	£4301	£4323	£4400	£4422	£5225	£5346	£5368
	2.0m	N/A	£3212 min. width 2.57m	£3355	£4422	£4444	£4565	£4587	£5412	£5533	£5555
	2.5m	N/A	£3311 min. width 3.00m	£3454	£4543	£4565	£4708	£4730	£5555	£5720	£5742
١ [3.0m	N/A	N/A	£3828 min. width 3.49m	£4944	£4972	£5137	£5159	£6149	£6336	£6358
	3.5m	N/A	N/A	N/A	N/A	£5181 min. width 4.03m	£5412	£5445	£6479 min. width 6.00m	£6666	£6688
	3.75	N/A	N/A	N/A	N/A	£5610	£5885	£5907	N/A	£7337	N/A

	Valance			
	LED light strip			
-	Aruba Heater			
5	Masonry Fixings			
	Bracket Covers			

ADDITIONAL OPTIONS AVAILABLE

Prices to be confirmed on quotation

All prices include VAT | For more information please contact sales@londoninteriorblinds.co.uk or call 07595 411700

Cuba - single unit

Motor limits are pre-set, with the handset and any sensors commissioned to the motor and the pitch of the awning pre-set to 14 degrees (25cm fall per metre) - required for rain shower water run off (EN13561). The pitch can be set at a different angle, if required.

- · Valance is available upto 30cm high, either straight or loose wave
- LED lighting strip is mounted on the wall beneath awning (1 year guarantee) Aruba heater is mounted on the wall beneath awning (1 year guarantee)
- Any other RAL colour and cantilever brackets increases lead time to 25 days

FREE delivery

CUBA - COUPLED UNIT

Our premium UK manufactured patio awnings feature superstrong alu frameworks, next generation motors & controls and exclusive CBA fabrics that upto 50% less dirt adheres.

Hardware:



PRICES INCLUDE SOMFY IO MOTOR WITH 5M POWER CABLE AND SITUO 5 VAR A/M HANDSET

The best value folding arm awning in the UK

Full cassette

• Multiple, across width of awning Fixing Points: Brackets: • Face fix (std) or top fix Fabric: World of Sattler collection

Anthracite Grey RAL 7016 matt fine textured

Other RAL colours available - price on request

Operation: • Motorised via integral Somfy IO motor (5m power cable)

• White RAL 9016 semi gloss

Manual via gear box & 1.4m detachable crank handle

• Face Fix - 220mm high x 147mm deep Casing Dims: • Top Fix - 247mm high x 160mm deep

• Quadruple cable, twin spring Arms:

- Upto 11.0m wide = 4

- 11.01m - 14.0m wide = 6

Pitch (Angle): • 5 - 38 degrees (10cm - 65cm per metre)

Fabric Width: • 170mm less than awning width

Wind Rating: • Class 3 under EN13561 (Beaufort 6 - 30mph, strong breeze) Sensors:

• Eolis 3D wirefree wind sensor io - price on request • Sunis wirefree II sun sensor io - price on request

Special Brackets: • Spreader plate - price on request (3 year quarantee) Cantilever bracket - price on request

(pe		8.0m	9.0m	10.0m	11.0m	12.0m	13.0m	14.0m					
PROJECTION (fixed)	1.5m												
CTIO	2.0m												
ROJE	2.5m		PRICES TBC on QUOTATION										
Ь	3.0m												
	3.5m												
	3.75												

	Valance	
NS	LED light strip	ADDITIONAL OPTIONS AVAILABLE
TIC	Aruba Heater	Prices to be confirmed on quotation
O	Masonry Fixings	
	Bracket Covers	

All prices include VAT | For more information please contact sales@londoninteriorblinds.co.uk or call 07595 411700

Cuba - coupled unit

Motor limits are pre-set, with the handset and any sensors commissioned to the motor and the pitch of the awning pre-set to 14 degrees (25cm fall per metre) - required for rain shower water run off (EN13561). The pitch can be set at a different angle, if required.

- Valance is available upto 30cm high, either straight or loose wave (no guarantee)
- LED lighting strip is mounted on the wall beneath awning (1 year guarantee) • Aruba heater is mounted on the wall beneath awning (1 year guarantee)
- Any other RAL colour and cantilever brackets increases lead time to 25 days
- FREE delivery

